

**VI TELEFILTER****Resonator Specification****TFR 433 G1****1/5****Measurement condition**

Ambient temperature: 25 °C  
 Input power level: 0 dBm  
 Terminating impedance  
     for input: 50Ω || 0pF  
     for output: 50Ω || 0pF

**Characteristics****Remark:**

The minimum of the pass band attenuation  $a_{\min}$  is defined as the insertion loss  $a_e$ . The centre frequency  $f_C$  is the frequency of the minimum of the passband attenuation  $a_{\min}$ . The tolerance for the centre frequency also includes a frequency shift due to the temperature coefficient of frequency  $TC_f$  in the operating temperature range and a production tolerance for the centre frequency  $f_C$ .

<b>D a t a</b>		<b>typ. value</b>	<b>tolerance/limit</b>
<b>Insertion loss</b> (Reference level)	$a_e = a_{\min}$	1,2 dB	max. 1,8 dB
<b>Centre frequency</b>	$f_C$	433,870 MHz	$\pm 75$ kHz
<b>Ageing of centre frequency</b>	$f_C$		max. $\pm 50$ ppm
<b>Parallel capacitance</b>	$C_0$	2,5 pF	-
<b>Motional resistance</b>	$R_1$	14,5 Ω	-
<b>Motional inductance</b>	$L_1$	94,8 μH	-
<b>Motional capacitance</b>	$C_1$	1,4 fF	-
<b>Operating temperature range</b>		-	- 10..... + 70 °C
<b>Storage temperature range</b>		-	- 30..... + 85 °C
<b>Turnover temperature</b>	$T_o$	30 °C	-
<b>Temperature Coefficient of frequency</b>	$TC_f^{**}$	- 0,036 ppm / K <sup>2</sup>	-
<b>Phase</b>	$\varphi$	-	-20 ..... + 20 °

\*\* $\Delta f(\text{Hz}) = TC_f(\text{ppm/K}^2) \times (T - T_o)^2 \times f_{T_o}(\text{MHz})$

generated:

---

checked / approved:

---

**TELEFILTER GmbH**  
**Potsdamer Straße 18**  
**D 14 513 TELTOW / Germany**  
**Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30**  
**E-Mail: [tft@telefilter.com](mailto:tft@telefilter.com)**

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.


**VI TELEFILTER**

**Resonator Specification**

**TFR 433 G1**

**Construction, pin configuration and 50 Ω - matching network**

(All dimensions in mm)


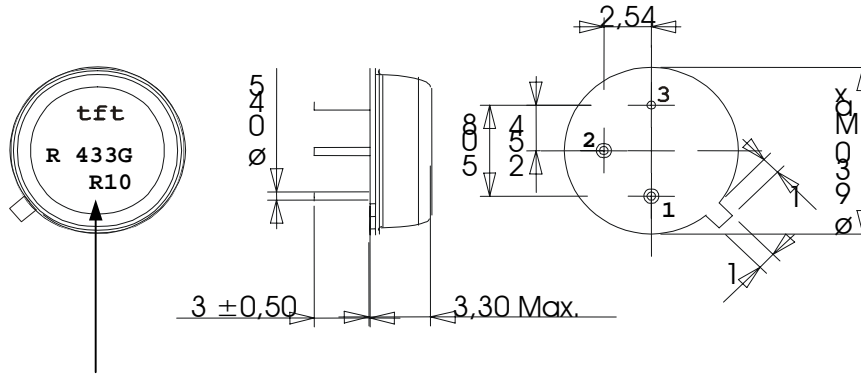


date code:                      year + week

N	2001
P	2002
R	2003
.....	

Pin 1	Input
Pin 2	Output
Pin 3	Package Ground

**50 Ohm Test circuit**

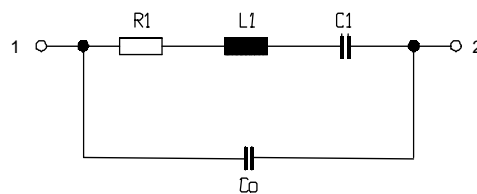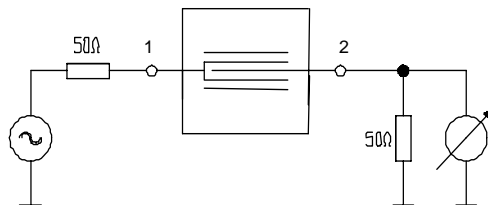

**TELEFILTER GmbH**  
 Potsdamer Straße 18  
 D 14 513 TELTOW / Germany  
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30  
 E-Mail: [tft@telefilter.com](mailto:tft@telefilter.com)

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

**Stability Characteristics**

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;  
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5g respectively, 1 octave per min, 10 cycles per plan, 3 plans;  
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles  
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: twice max.;  
for temperature conditions, please refer to the attached "Air reflow temperature conditions" on page 4;

**VI TELEFILTER****Resonator Specification****TFR 433 G1****4/5****Air reflow temperature conditions**

1st and 2nd air reflow profile

<b>Name:</b>	pre-heating periods	main-heating periods	peak temperature
<b>Temperature:</b>	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
<b>Time:</b>	60 sec. - 90 sec.	20 sec. - 25 sec.	

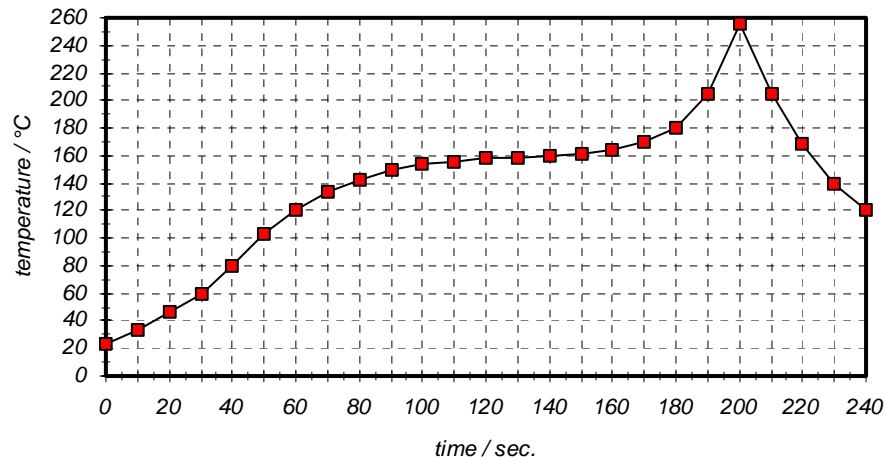
**Chip-mount air reflow profile**

Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

**History**

TELEFILTER GmbH  
 Potsdamer Straße 18  
 D 14 513 TELTOW / Germany  
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30  
 E-Mail: [tft@telefilter.com](mailto:tft@telefilter.com)

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

**VI TELEFILTER****Resonator Specification****TFR 433 G1****5/5**

---

<b>Version</b>	<b>Reason of Changes</b>	<b>Name</b>	<b>Date</b>
1.0	generate specification	Pfeiffer	20.03.2003

---

**TELEFILTER GmbH**  
**Potsdamer Straße 18**  
**D 14 513 TELTOW / Germany**  
**Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30**  
**E-Mail: [tft@telefilter.com](mailto:tft@telefilter.com)**

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.